



03-110

TRAILER HITCH

WILL FIT CLUB CAR® PRECEDENT®
INSTALLATION INSTRUCTIONS

INCLUDED:

Trailer Hitch
Receiver
Pin and Clip
Hardware Pack

TOOLS NEEDED:

14mm Socket
14mm Wrench



Trailer Hitch


We recommend professional installation. If you choose to not have this product installed by a professional, we highly recommend that you exercise caution, care, and patience when installing this product as it involves drilling holes into your cart's body.

NOTE: This will not work with a seat kit.

Switch key to OFF position. Place TOW/
RUN switch to TOW. It is not required to
remove the batteries but you do need to
disconnect the main negative.



Raise cart with floor jack and place jack
stands under front frame.

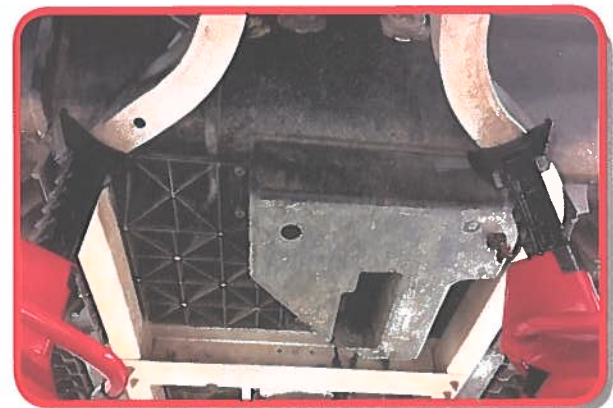

Remove four bolts located under main frame plate. Do not retain hardware, keep spring plate.



With main plate loose, slide hitch between OEM frame mount and main plate.





NOTE: A pry bar may be needed to create space between frame mount and main plate.



With hitch mounting holes aligned with OEM frame mount and main plate, hand tighten 10x75mm bolts included with this kit. Once all four bolts are in place, then tighten.



NOTE: Be sure to use lock washers and flat washers in addition to thread locking adhesive.

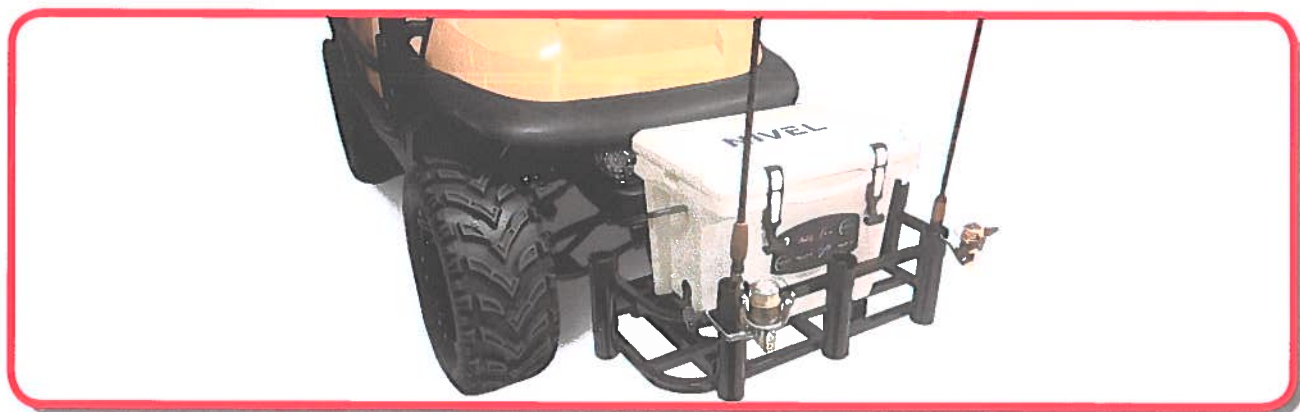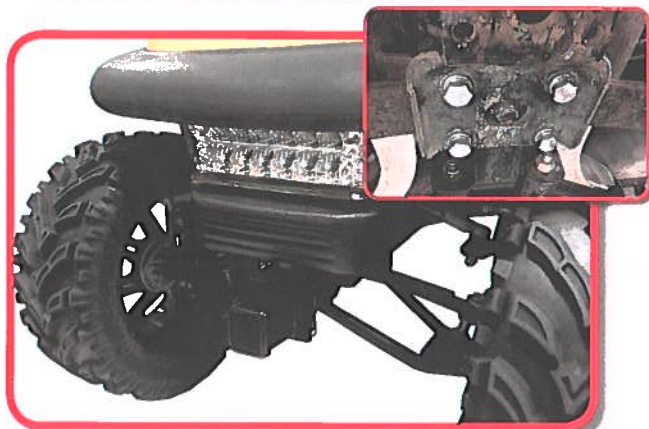

INSTALLATION COMPLETE

Club Car®, Club Car® Precedent®, and Club Car® DS® are registered trademarks of Ingersoll Rand, Inc. ("Ingersoll Rand"). Reference to Club Car®, Club Car® Precedent®, or Club Car® DS® or any of Ingersoll Rand's trademarks, word marks, or products is only for purposes of identifying golf carts with which this GTW product is compatible. GTW products are aftermarket parts and are not original equipment parts. GTW is not connected to, affiliated with, sponsored by, or endorsed by Ingersoll Rand or any of its subsidiary companies.