

CHR JL 5001 DUAL EXHAUST For Club Car DS Models and EZGO TXT and Marathon Models Installation Instructions



Directions for Club Car DS Models:


- A) Locate the unused hole in the hitch pin hole of the cart.
- **B)** Attach the Dual Exhaust Tips with the supplied 3/8" bolt and lock nut.
- C) Center the Dual Exhaust Tips and torque the lock nut, bolt and washers to 14 foot pounds.

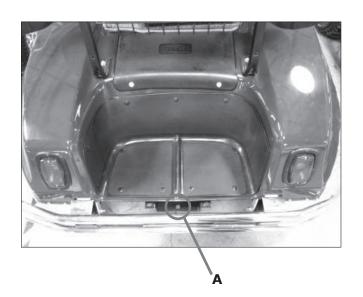




Directions for EZGO TXT and Marathon Models:

- A) Locate the unused hole in the rear of the bag well.
- **B)** Attach the Dual Exhaust Tips with the supplied 3/8" bolt and lock nut.
- C) Center the Dual Exhaust Tips and torque the lock nut, bolt and washer to 14 foot pounds.





Buggies Unlimited 1-888-444-9994 www.buggiesunlimited.com

ted

[©] Copyright 1997-2008 Buggies Unlimited. All Rights Reserved.