



# WND CC1 WTINT & WND CC1 WCLR WND CC2 WTINT & WND CC2 WCLR Winged Windshield Tinted & Clear Club Car DS 1982-2000.5 & 2000.5-2006

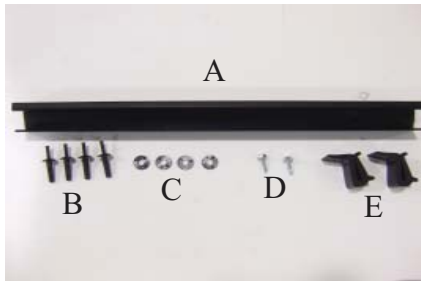

## Components

- A. Windshield Clip (1)
- B. Rivets (4)
- C. Washers (4)
- D. Self Drilling Screws (2)
- E. Upper Windshield Retainers (2)

 **CAUTION:** Remember to wear appropriate eye protection while performing the tasks in this instruction.

## Installation Instructions

1. Attach windshield clip to roof strut that runs across cart's dash. (See figure 1)
2. Place the windshield so that it rests in the clip that is attached to the dash. Open windshield.
3. Locate the four grommets on the windshield and use a marker to mark location to be drilled. (See figure 2) The grommets should align with roof struts.
4. Remove windshield from clip.
5. Drill marked holes using a 1/4" drill bit.
6. Place the windshield back in the windshield clip. Place a plastic washer between the windshield and the roof strut so that it is aligned with a grommet. Place rivet through grommet on windshield, washer, and drilled hole.
7. Using a hammer or a mallet, tap rivet lightly until rivet is flush with windshield. Repeat using the other rivets and washers. (See figure 3)
8. Install (2) upper windshield retainers. Clip retainer to strut (See figure 4), and use self drilling screw to attach the retainer to the strut. This will be drilled on the inside of the strut. (See figure 5)

NOTE: Please read additional cleaning instructions for proper care of windshield.

