

2000.5~Up Chameleon Rail Placement  
(Club Car DS)



**Wear Appropriate Eye Protection!**



On the side rails the single pre-drilled hole mounts to the rear roof strut rear bolt. You will use only the one bolt and 1/2" spacer that is in the hardware kit. On the front of the rail install one self tapping screw supplied in the hardware kit. On early production rails the spacer is not used. For better alignment between the rear rail and side rails (early production) cut the rear rail by one inch to 34 inches for better side cover to rear cover alignment.




The rails measure:  
45" side rails....  
35" rear rail...

To mount the rear rail face the channels outward just like the side rail C-channels face outward. Set the rail in place centered and attach with the supplied self tapping screws.

**Tech Tip:** For easier side curtain and rear curtain bead installation into C-channel. Use a round file or knife to chamfer the end of C-channels. The sharp edges can make it difficult to slide the bead into the C-channel.

**Note:** Early production rails are silver and angled on the front. Second generation rails are black and squared. They work exactly the same.

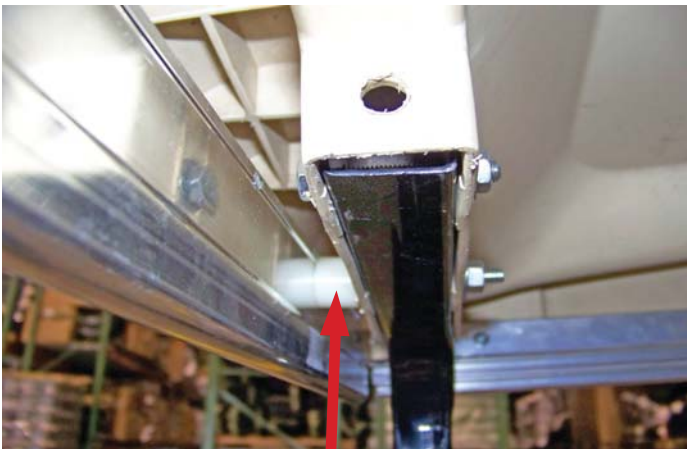

1/2" Spacer Placement

C-channel Black Plugs

Spacers

Hardware



Black Plugs Go Here



Front Side Rail Screw Placement



Rear Rail Placement



Rear Strut Single Bolt Mount