




LHT EZ9 0789/0775 Blue Dot Tail Light Installation Instruction

Observe all safety cautions while performing this installation. Wear appropriate eye protection and battery disconnection. If the car uses a run/tow switch (Regenerative/Dynamic Braking) make sure the switch is in the tow position before disconnecting (Electric Models Only)!

Mount the light assembly with the appropriate template and mounting screws. EZGO will use four screws per light and Club Car and Yamaha will use two screws per light. Use a 1/8" drill bit for the drilling of the mounting holes.

When connecting the light, cut the harness end off. Wire strip the Red, Brown and Black wire 1/2" and install the new male and female connectors. Make sure you crimp the appropriate end that corresponds to the existing tail light connector.

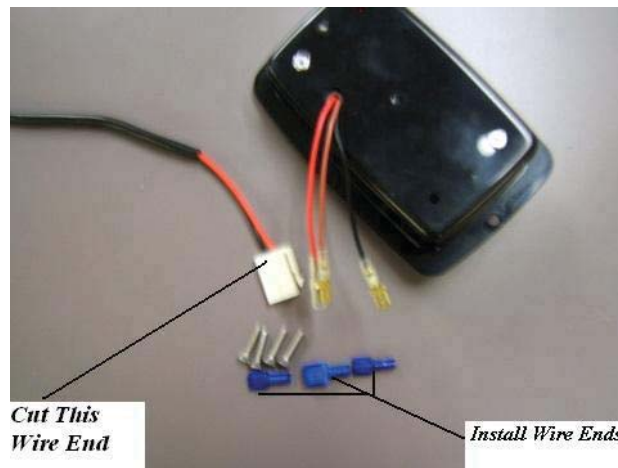

Your tail light wires should be connected as follows:

Tail Light Wire Color	Connect to
Black	Wire Harness negative (normally black)
Red	Brake/Turn signal wire
Brown	Tail Light wire

Buggies Unlimited
1-888-444-9994
www.buggiesunlimited.com