



INSTALLATION INSTRUCTIONS

E-Z-GO TXT RADIO CONSOLE



- E-5-50** - ABS Black Finish
- E-5-50RB** - Regal Burl Finish
- E-5-50CF** - Carbon Fiber Finish

Part List:

- Console
 - Top Mount Bracket
 - "L" Bracket For Rear Radio Support
 - 16 - #8 1/2" Long
- (Radio & Speakers Not Included)**

Tools Needed: Cordless Drill with 1/16" Phillips Bit
Phillips Screw Driver & Pencil

INSTALLATION

Speaker holes are cut for 6" round speakers.
Speakers not included.

IMPORTANT! You must have a 12 volt power supply before connecting your radio.

STEP 1:

Align white mounting bracket flat against front center of top as shown in picture below. Mark drill holes to top and use 1/16" drill bit to drill starter holes for screws. **BE CAREFUL TO DRILL THROUGH BOTTOM SKIN ONLY!** Use a drill guide and set depth to a 1/4" Max. We are not responsible for the holes drilled through top of top.

STEP 2:



Use 8 screws provided to attach top mounting bracket. As shown in picture below.



STEP 3:

Install radio unit per manufacturers instructions. Make sure to ground rear. Use "L" bracket (shown on facing page with arrows) to support rear of radio. Attach using the bolt or screw on rear of radio. Adjust to correct height and then tighten screw. When location is set lift up the rear of radio to remove cover on tape on bottom of bracket and press in place. **DO NOT INSTALL SPEAKERS AT THIS TIME!**

INSTALLATION

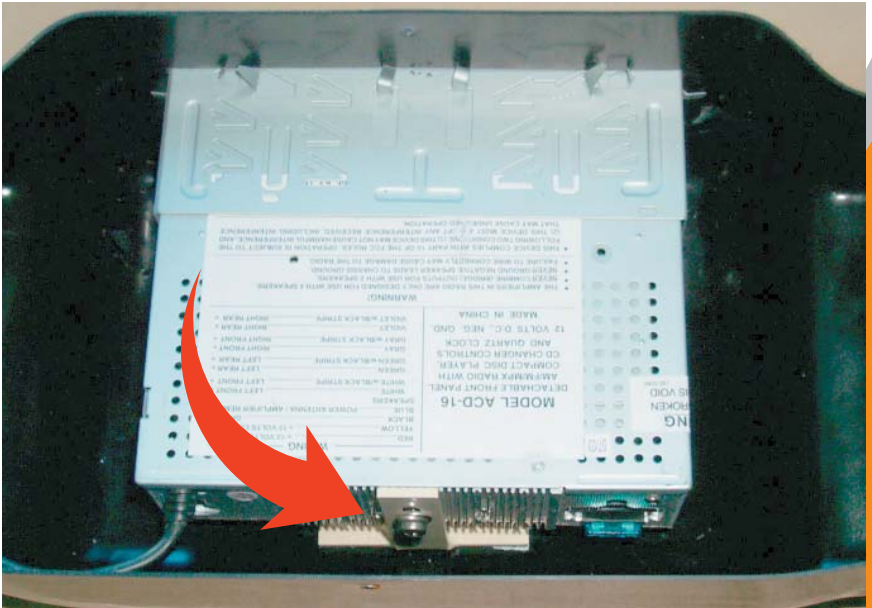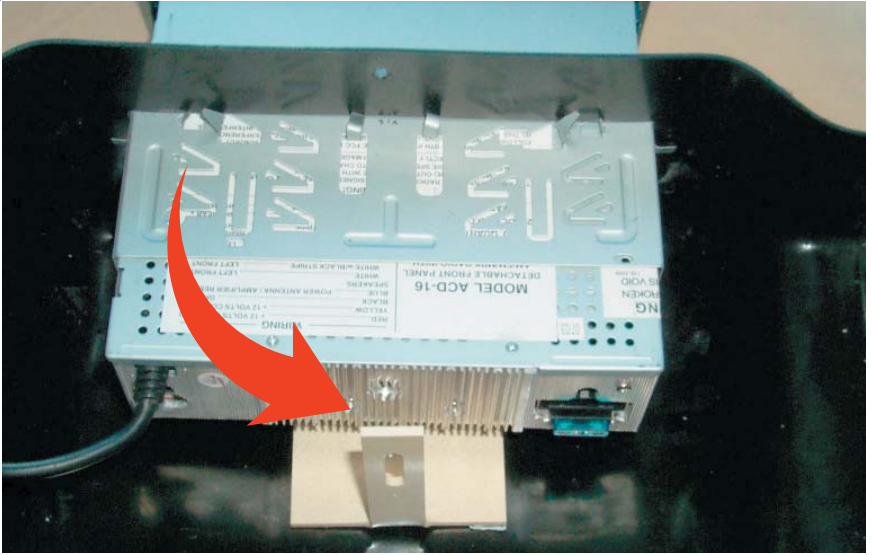

INSTALLATION

STEP 4:

Speakers can be installed now or later depending on your wiring needs.

STEP 5:

All wiring should be done at this time. Suggestion: The front supports can be used to run wiring down to body by drilling holes big enough for your wire to run through a grommet.

WE MAKE NO RECOMMENDATIONS ON HOW THIS IS DONE.

STEP 6:

Lift console up over bracket as shown below and attach using screws provided.



Golf Car Accessories Leader