

Rear Seat Bag Rack Combo
RS EZ2 BGR
WHT/TAN



BUGGIES
UNLIMITED



Remove existing bag rack and sweater basket, retain the hardware for later use.

Wear the appropriate eye protection during the installation!


Set the new seat assembly in place and install the forward mounting bolts.

Leave all nuts and bolts loose during assembly to aid in hole alignment.


Install the two carriage bolts through the existing bag well holes. This will fasten to the rear step plate to secure in place.

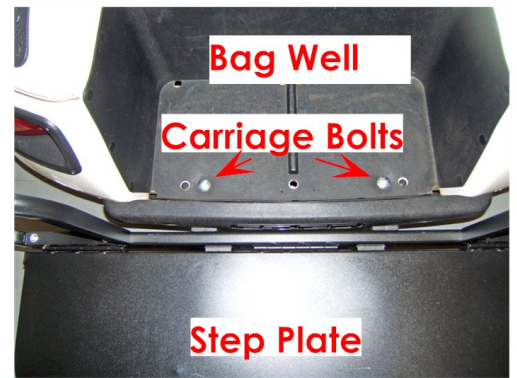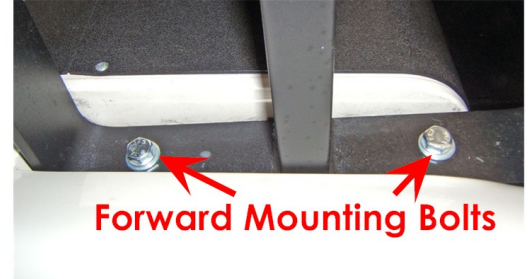

Install the hinge mounting bolts from the rear side of the cart.

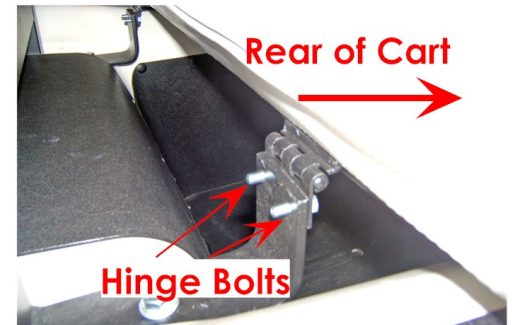

Install Roof Struts

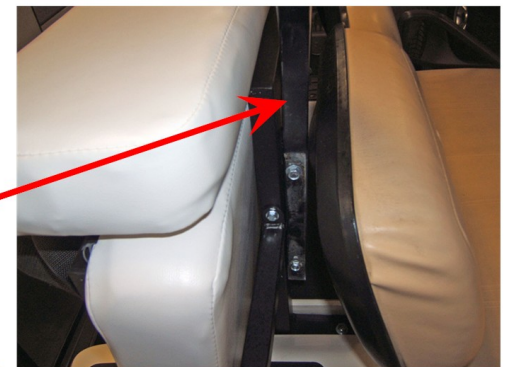

Completed Assembly and at this time tighten all mounting nuts and bolts.

