



Caution: Wear Appropriate Eye Protection!



RXV Chameleon

Rail Placement Onto Roof

RXV Side Rails


- Center 47 ³/₄" side rails with C-channel facing outward. Install noticed area flush against front windshield up-right. Install self tapping screws into rail.

Side Rail



RXV Side Rails

- Rear mounting for side rail. Use self tapping screw to mount in the area shown.

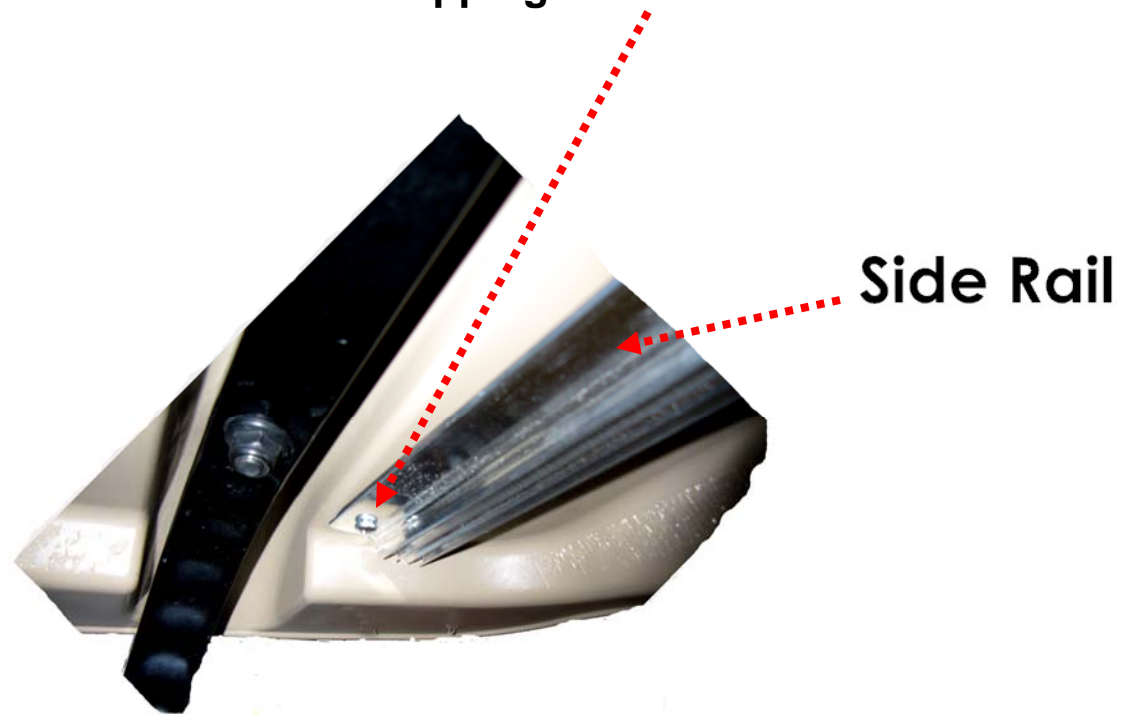

RXV Rear Rail

- Center the 32 3/4" rail between the two rear roof mounting struts. The C-channel will face towards the rear of car. This aligns slightly behind the car's seat back. This area will be slightly curved, but the flat rail will bend with the curvature of the roof struts allowing the screws to be installed.

Side Rail



Back Rail

RXV Corner Alignment

- After the side and rear rails are installed, they should align as per picture.



Sample Look

- RXV will look Similar to The Drive Model below.



© Copyright Nivel LLC
All Rights Reserved