


FF YA3B ... BLK Yamaha Folding Rear Seat Kit
Kit Includes



BUGGIES
UNLIMITED

- 1X Step Plate (A)
- 1X Folding Deck (B)
- 2X Front Seat Back Uprights (C)
- 2X Handrails (D)
- 1X Rear Seat Cushion Set (E)
- 2X Deck Support Brackets (F)
- 2X Rear Seat Back Uprights (G)
- 1X Canopy Frame (H)
- 1X Rear Seat Back Uprights (I)
- 1X Hardware Kit (Not Shown)

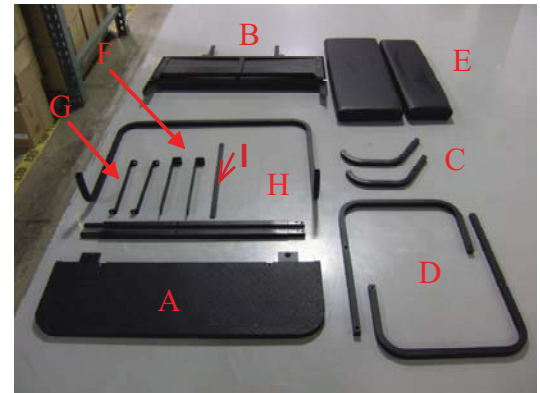

Caution:
Always disconnect the negative battery cable from the battery or battery pack before beginning. If your cart is equipped with a Tow/Run switch, place the switch in the Tow position first. Always wear the appropriate eye protection!



1. Remove the six bolts holding the plastic canopy to the aluminum canopy frame. Lift the canopy off the frame and set aside. See Figure 1.



Figure 1

2. Remove the front seat backs from the OEM seat back uprights. Set this original hardware aside as it will be reused. Remove the four bolts holding the rear canopy supports to the bag rack. Separate the rear and middle pieces of the canopy frame from the front support and set aside. See Figure 2.



Figure 2

3. Remove the access panel. Remove the four bolts holding the front seat back uprights to the frame. Set this hardware aside for later use. Remove the seat back uprights and bag rack from the cart. See Figure 3.



Figure 3

4. Remove the two bolts securing the rear bumper to the frame and remove the bumper from the cart. See Figure 4.



Figure 4

5. The rear seat plate will install onto the cart in location as the factory bumper. Place the step plate mounting tabs on top of the frame gussets and secure with two 3/8-16 X 1" bolts and washers. Install folding deck rear supports onto step plate using two 3/8-16 X 1.75" bolts and washers. The folding deck rear supports install from underneath the step plate. See Figure 5. **Do not tighten hardware at this time.**



Figure 5

6. Install the two replacement front seat uprights into the frame with the OEM hardware. Install the factory front seat backs onto the new uprights with existing hardware. See Figure 6. Tighten seat back mounting bolt, **but leave the upright to frame bolts loose.**



Figure 6

7. Lay the folding deck onto the rear supports. Using two 5/16-18 X 1.75" bolts, washers, and lock nuts, secure the front of the folding deck to the front seat back uprights. Use the provided 5/16" spacers in between the Folding deck & seat back uprights to ensure proper alignment of the front seat backs. The folding deck rear supports will be secured with two 3/8-16 X 1" bolts, washers, and lock nuts. Install each of the two handrails onto the folding deck and step plate using two 5/16-18 X 1.5" bolts, washers, and lock nuts for the folding deck mounts and one 5/16-18 X 2.75" bolt, washer set, and lock nut for the step plate mount. See Figure 7.



Figure 7

8. Assemble roof frame using the provided rear strut supports and center sections. Secure by installing rear seat back uprights using two 1/4-20 X 2.75" bolts, washers, and lock nuts for the front seat back upright mounts and two 5/16-18 X 1" bolts, washers, and lock nuts for the folding deck mounts. See Figure 8.



Figure 8

9. Now go back through the rear seat kit and tighten all hardware left loose in the previous steps and reinstall the rear access panel.

10. Attach the rear seat bottom cushion to the folding deck frame with six 1.25 wood screws. Install the pull strap between the seat bottom and folding deck frame and secure with the upper middle wood screw. See Figure 9.

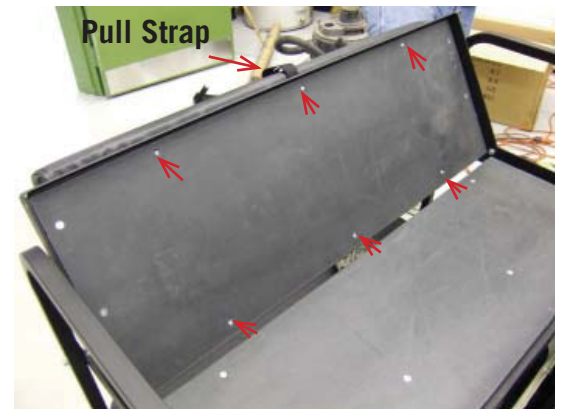


Figure 9

11. Install rear seat back and rear seat back brace onto the rear seat back uprights with two 1/4 X 1" bolts. The rear seat back brace installs on the inside of the rear seat back uprights. See Figure 10.



Figure 10

12. Reinstall the canopy using original hardware.

Buggies Unlimited
1-888-444-9994
www.buggiesunlimited.com

©1997-2008 Buggies Unlimited. All Rights Reserved.