



Part# 03-099

FENDER FLARES will fit CLUB CAR® TEMPO®

Installation Instructions

INCLUDED:



Front Fender Flares



Rear Fender Flares

Optional Orange Reflectors



20 x Mounting Screws

We recommend professional installation. If you choose to not have this product installed by a professional, we highly recommend that you exercise caution, care, and patience when installing this product as it involves drilling holes into your car's body.

DRIVER SIDE FRONT


The back side of each **Fender Flare** is marked with it's abbreviated location. FL is for Front Left (Driver side), front flares also have a molded in reflector that can be changed out to the supplied orange lens if desired.

A) Hold the fender flare in place using the **middle notched section** to clear the strut cover and the **bottom flange** to hook under the front edge of the side skirt. Front point of flare should meet bottom edge of front fasci. Make sure all screw holes are positioned over the plastic fascia/side skirt and mark mounting locations.

B) Using a 1/8" bit, drill out the mounting positions for screws to avoid chewing of plastic fascia/side skirts.

C) Secure Fender Flare to cart using a #3 Phillips tip and supplied mounting screws.

Repeat on Passenger side.

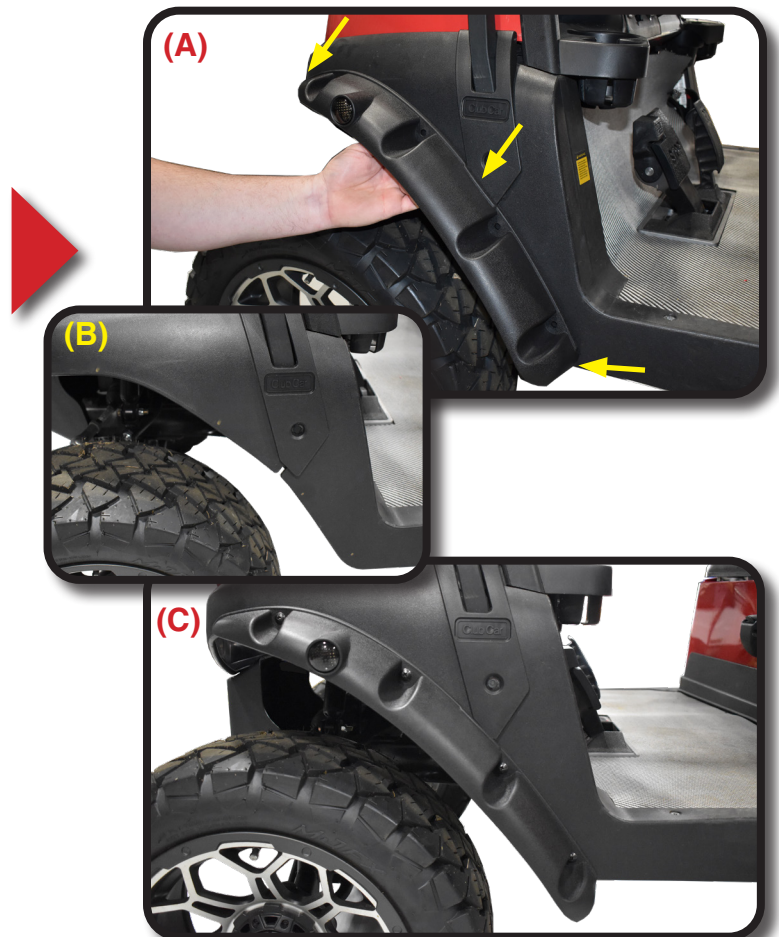

DRIVER SIDE REAR

Find the Fender Flare marked RL, for Rear Left (Driver side).

A) Hold the fender flare in place using the bottom flange on the front end of flare to hook under the underbody. The rear pointed edge of flare will be flush with rear underbody.

B) Start with the forwardmost three mounting holes and mark their locations. Using a 1/8" bit, drill out the three mounting positions for screws to avoid chewing of plastic underbody. Secure front half of Fender Flare to cart using a #3 Phillips tip and supplied mounting screws.

C) With front of flare secured, push rear point to underbody edge and drill out screw holes. Secure final two holes with supplied screws.

Repeat on Passenger side.



INSTALLATION COMPLETE