

BSG YA4 CHR & BSG YA4 BLK


Brush Guard Installation Instructions
for Yamaha G22 2002-Present Models



BUGGIES
UNLIMITED

Parts List

QTY	Description
1	Brush Guard
2	3/8-16 x 2-3/4" Bolts
2	3/8-16 x 1" Bolts
4	3/8" Nyloc Nuts
4	3/8" Washers
2	2" Black Spacers




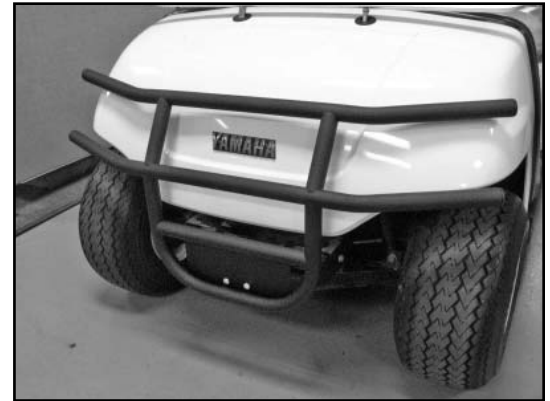


 **Always remember to wear appropriate eye protection!**

1. Remove the front bumper from cart (Figure 1).
2. Place the two 2-3/4" bolts, from your mounting kit, through the front of the mounting plate and slide the 2" spacers onto the bolts from the back of the mounting plate (Figure 2).
3. Mount the brush guard onto the front of the frame of the cart using two washers and two nuts (Figure 3).

NOTE: Leave all hardware loose until final step.

4. Using the two 1" bolts, two washers, and two nuts attach the mounting tabs of the brush guard to the top holes of the frame (Figure 4).
5. Securely tighten all of the hardware.

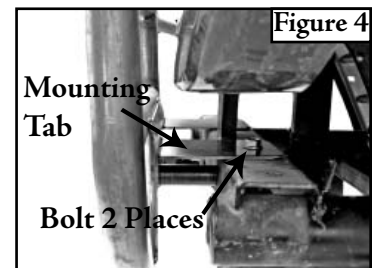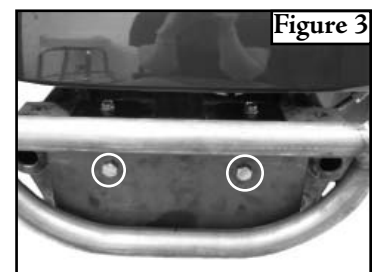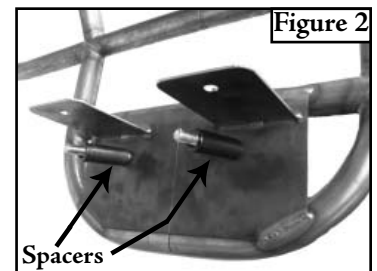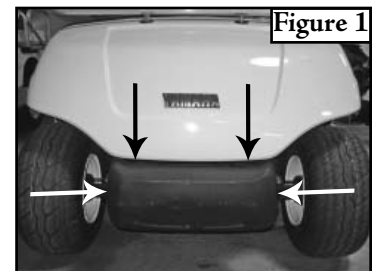

Buggies Unlimited
1-888-444-9994
www.buggiesunlimited.com