





JL YA 5002K DUAL EXHAUST

For Yamaha G14/16/19 & 22 Models Installation Instructions



Remember to wear appropriate eye protection.

- A) Locate the two unused holes on the backside of the steel cross member running behind the plastic rear bumper and in front of the rear pan hard bar.
- B) Attach the Dual Exhaust Tips with the two supplied 5/16" bolts, washers, and lock nuts.
- C) Torque the lock nuts, bolts and washers, to 14 foot pounds.
- D) While applying torque to the bolts, make sure the unit is centered.

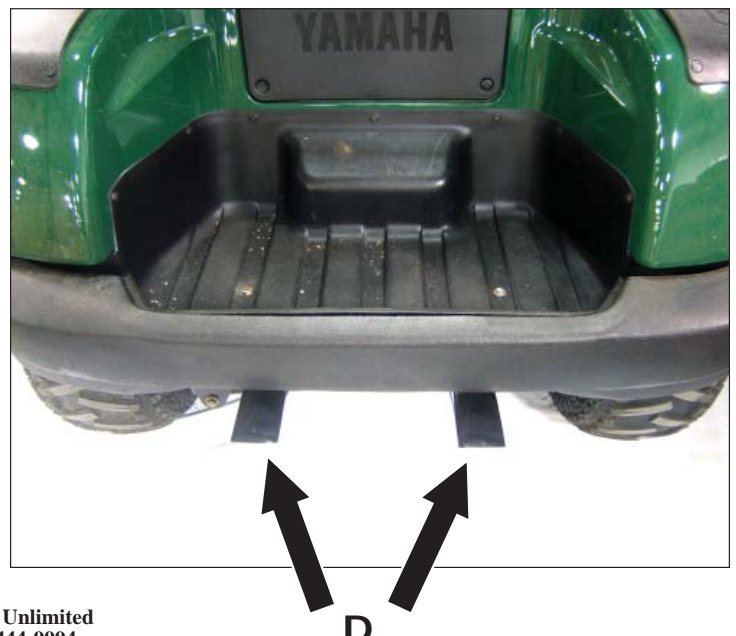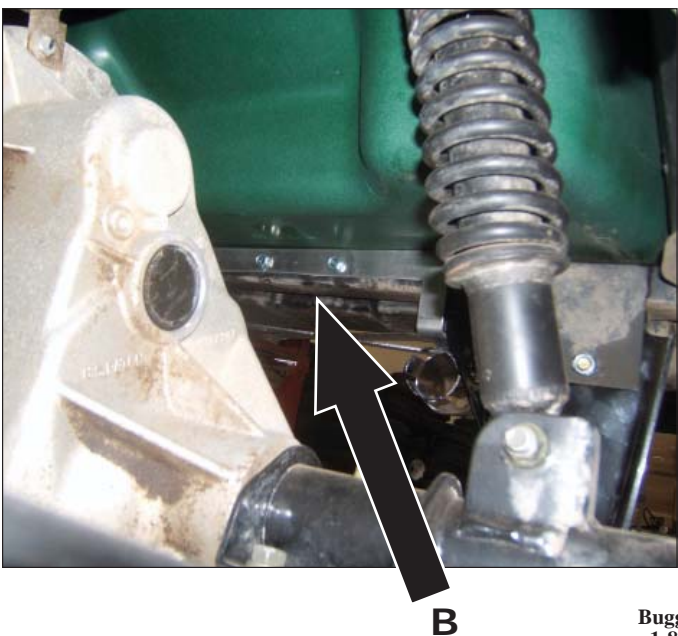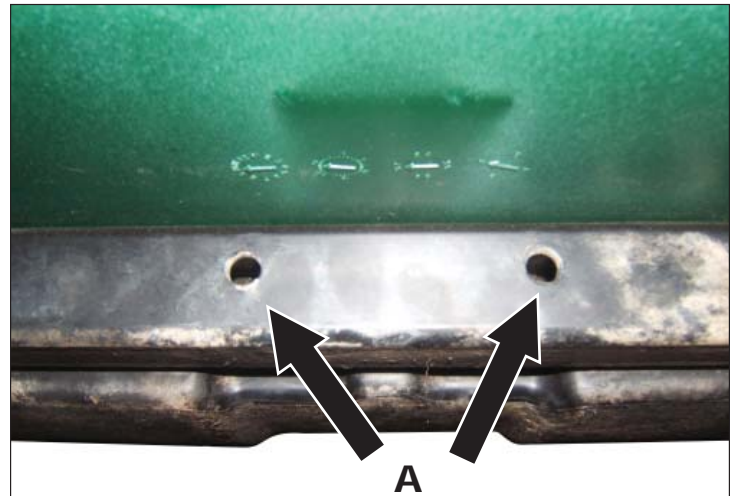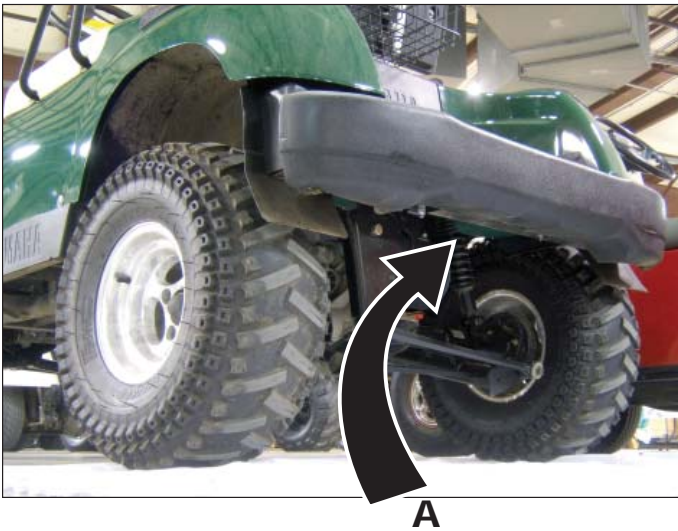

Buggies Unlimited
1-888-444-9994
www.buggiesunlimited.com

© Copyright 1997-2008 Buggies Unlimited. All Rights Reserved.