

HTH YA0 KIT

Tow & Hitch Kit

Yamaha G14, G16, & G19



BUGGIES
UNLIMITED

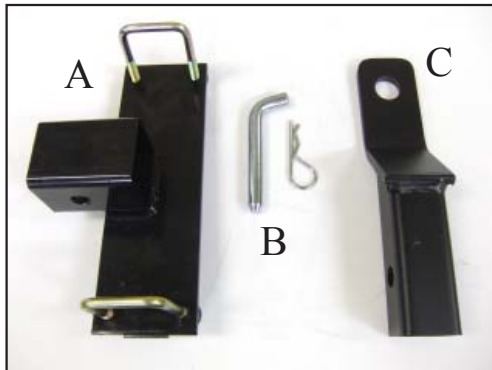


Figure 1

Kit Components

- A. Receiver with U-Bolts
- B. Pin & Clip
- C. Reese Hitch

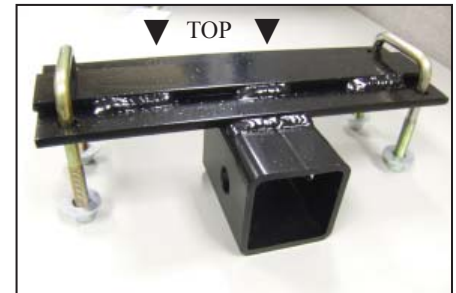


Figure 2



Always wear appropriate eye protection when working on your vehicle.

INSTALLATION INSTRUCTIONS

1. Locate rear frame rail. This is on the rear of the cart directly behind the bumper.
2. Place U-bolts around rear frame rail so that the threaded end is hanging down.
3. Take receiver (figure 2) and align top with the rear frame rail. Align holes in receiver with U-bolts and slide U-bolts through holes.
4. Apply supplied washers and nuts to U-bolts. Now tighten all hardware securely.
5. Insert hitch (part C, figure 1) into receiver (part A, figure 1). Make sure hole in hitch aligns with the hole in the receiver.
6. Insert pin through aligned holes, and apply the clip to the end of the pin.
7. Requires hitch ball with 1" shank diameter.

NOTE: Hitch Ball sold separately at www.buggiesunlimited.com Heavy duty coil springs are recommended for rear suspension support. Buggies Unlimited Part Number SUS YA5 REAR.



CAUTION: Always remove Hitch Mount when not in use. Hitch mount could cause injury to persons passing closely behind cart. Backing into objects with the Hitch Mount in place will cause severe damage to that object.