


**NFB YA5 5127, NFB YA5
CHR, NFB YA5 SS, NFB
YA5 BLK, NFB YA5 RED
Nerf Bar Kit
For Models G14 - G22**



**Remember to
wear appropriate
eye protection!**

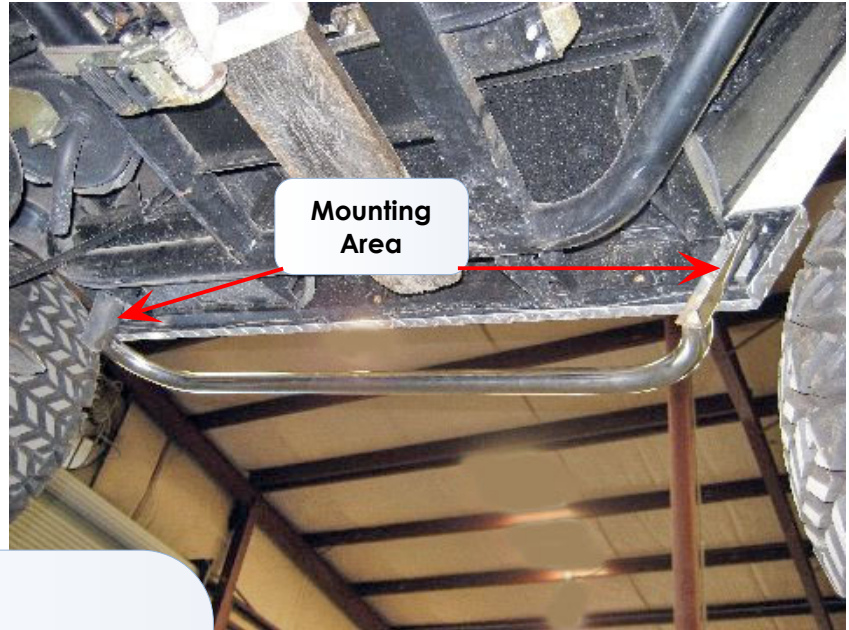

Installation

Place the Nerf Bar with 1" spacers against the inside of the rocker or kick panel of the cart. Mark the proposed hole locations.

Note: Before drilling, make sure hole locations do not interfere with the cart's original gussets, brackets or accessory wiring on the backside of rocker panels!

Note: It's recommended to hold the screw and tighten the nut. Tightening the screw and holding the nut could cause sharp burrs to be pealed up on the screw face, causing a hazard.

Drill two 5/16" holes at the marked locations, matching the Nerf Bar hole pattern. Install Nerf Bar brackets behind rocker panel using a 1 1/4 X 1 1/4" spacer block. Insert one bolt through a flat washer, through the rocker panel, through the spacer, then through the Nerf Bar bracket. Secure it with the locknut supplied.

