


FF YA6 SDT BLK

Flip Flop Kit for Yamaha Drive Sandstone w/Black Frame



BUGGIES
UNLIMITED

- A) Seat Backs (2)
- B) Seat Assembly
- C) Safety Bar
- D) Step Plate Brackets (2)
- E) Seat Bottom Supports (2)
- F) Step Plate Supports
- G) Step Plate
- H) Bagwell Brace
- I) Front Seat Back Brackets (2)
- J) Bagwell Uprights (2)
- K) Spacers (2)
- L) L Brackets (2)
- M) Hardware

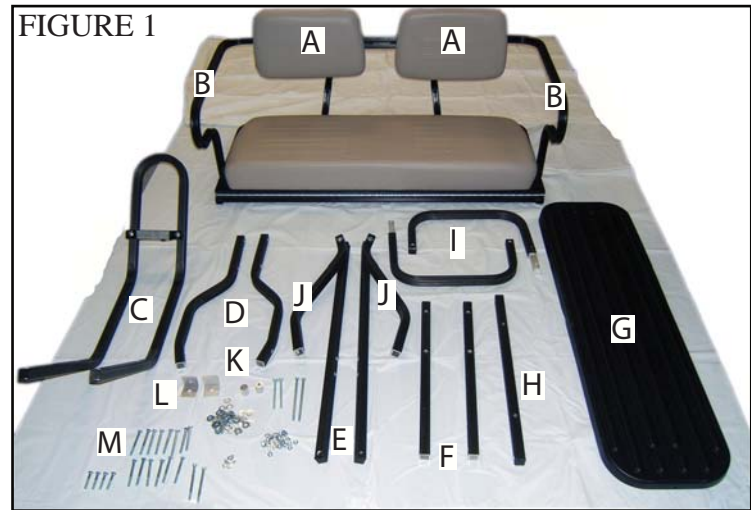

Installation Instructions:

- 1) Remove the existing factory bag rack, roof supports and drain tubes.
- 2) Lay out the seat frame work and leave all existing bolts and nuts loose. Tighten the bolts and nuts after frame work, footstep, and seat are in place. By leaving things loose you will be able to better manipulate the fitting of bolt holes and alignment of brackets. (See Figure 2)
- 3) Assemble rear seat support frame and attach to rear of golf cart. (See Figure 3)
- 4) Attach seat bottom supports (E), L brackets (L), bagwell brace (H), and bagwell uprights (J).
- 5) Set the seat assembly onto the frame work. Attach seat assembly to frame work using 1 1/2" bolts, washers, and nuts.
- 6) Install the step plate brackets (D), and step plate (G). (SEE FIGURE 3)
- 7) Install the step plate supports and spacers. (SEE FIGURE 4)
- 8) Install safety bar.
- 9) Tighten all hardware at this time. For properly installed rear seat see figure 5.



FIGURE 3

FF YA6 SDT BLK
Flip Flop Kit for Yamaha Drive
Sandstone w/Black Frame

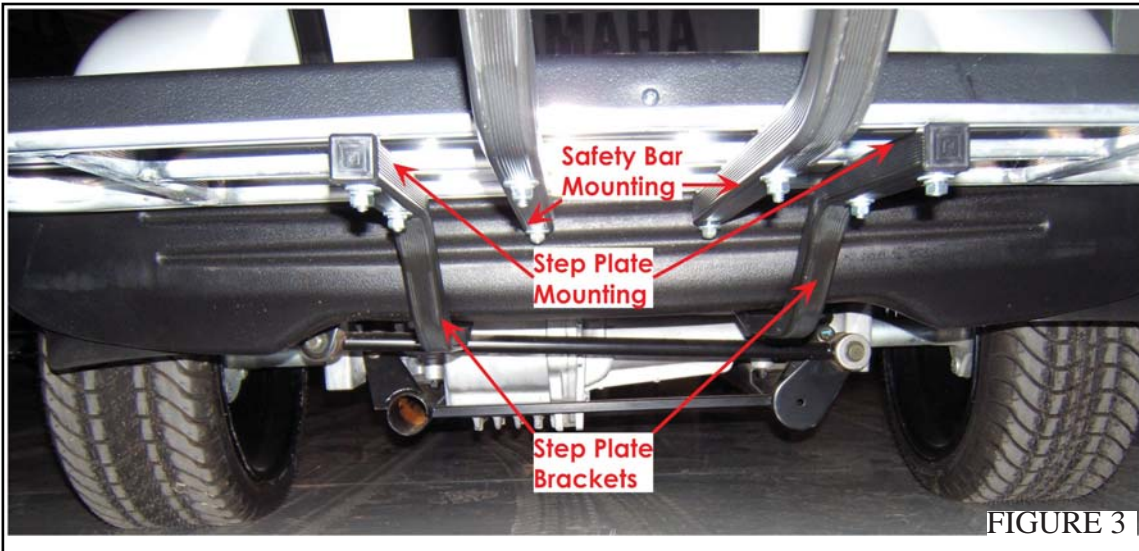


FIGURE 3



FIGURE 4



FIGURE 5