


1140/1141_12 and 36 Volt Solenoid

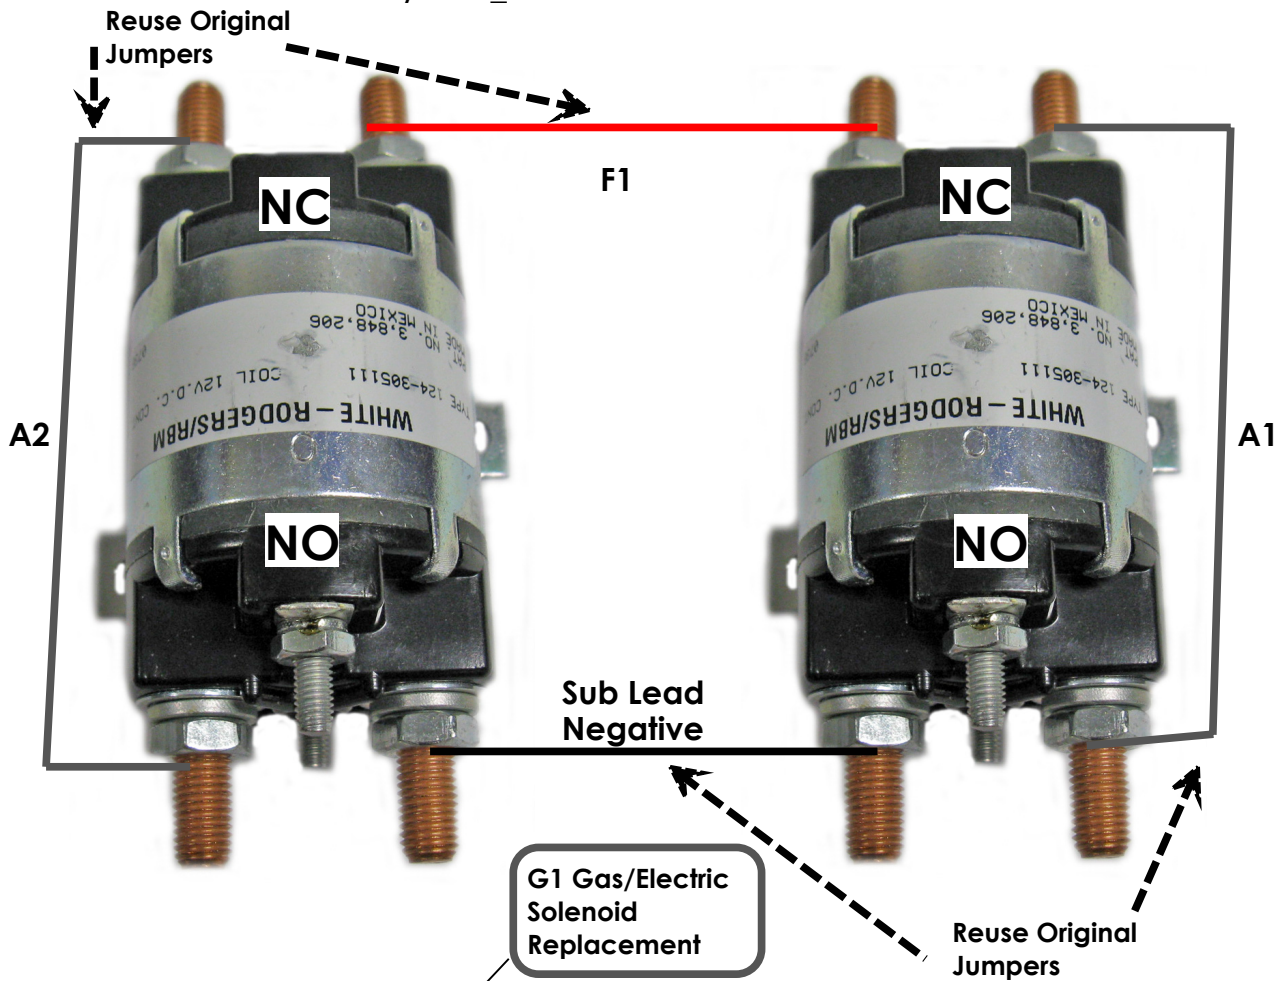

The O.E.M. solenoid contacts are opposite to the new replacement. The old style has normally open (NO) contacts on the two pole end. The four pole end is normally closed (NC). The replacement solenoid is NO on the four pole end and NC on the two pole end.

Electric Carts:
 A1 is F1 and A2 is F2. Battery positive connects to NO end and the resistor lead cable connects to the NC end. The battery charging lead wire connects to positive at NO.

Gas Cars:
 F1 cable connects to NC end of solenoid.
 Battery negative cable connects to NO end of solenoid with the Sub Lead wire.

