



LED LIGHT KIT

WILL FIT *E-Z-GO® RXV®

PART# 32023

INSTALLATION INSTRUCTIONS

INCLUDED:

2 LED Headlights
2 LED Tail Lights
Premium Wiring Harness
Screws
Straps
Rocker Switch

TOOLS NEEDED:

#2 Phillips bit
Cutting Tool
Sandpaper
Power Drill
15/32 Drill Bit
Marking Pen


Premium Harness



8 Screws



LED Headlights



Straps

LED Tail Lights

We recommend professional installation. If you choose to not have this product installed by a professional, we highly recommend that you exercise caution, care, and patience when installing this product as it involves drilling holes into your car's body.

NOTE: This kit includes a premium harness that is compatible with our upgrade turn signal kit Part# 32034.


Cut out template and place it against cart using the body lines for alignment. Draw the inside of the template out with a marking pen.



DRILL PILOT HOLE



Next drill a pilot hole so you will have a starting point to begin cutting.

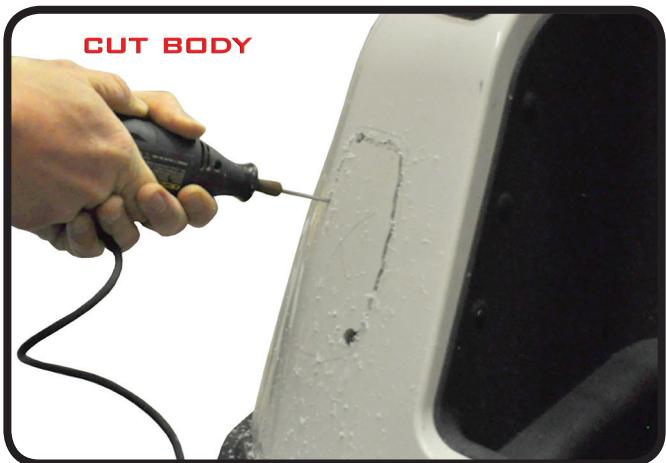

Using the template you drew on the car, cut out the light area of the body starting at the pilot hole from step 2.

Place LED tail light into the rear of the vehicle. Insert and attach tail light using supplied hardware.
*Repeat process on opposite side
NOTE: Red 3 pin Connector's are for passenger side lights.



Place headlight template against car using the body lines for alignment. Draw the inside of the template out with a marking pen.

Drill a pilot hole and cut out the shape of the headlight.




7
Insert LED headlights and attach to car using clips located behind the headlight.



8
Run wiring harness beside the frame so it doesn't hang. Secure it with wire ties to keep it in place while you are riding.




9
Secure wiring harness in a battery box allowing for easy battery connections.

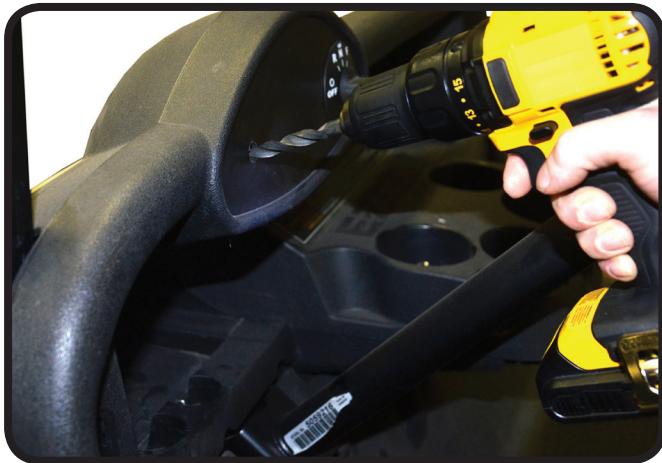

10
Using a 15/32" drill bit, drill out the hole for the rocker switch.*Drill gently.

11

Unscrew torx-head screws and remove dashboard. Retain hardware.
*Do not remove completely.

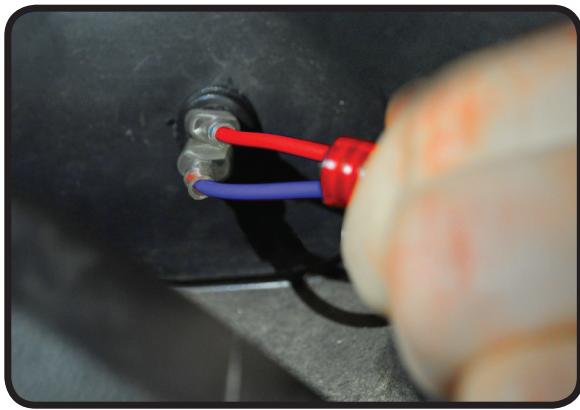


12

Load - 12v(+) switched
Supply - 12v(+) constant
Attach harness to Rocker Switch
as shown.

13

CAUTION: THIS LIGHT KIT IS A 12V SYSTEM. SUPPLYING MORE THAN 12V TO THE SYSTEM WILL DAMAGE THE LIGHT KIT AND VOID YOUR WARRANTY. DO NOT OVERLOAD.

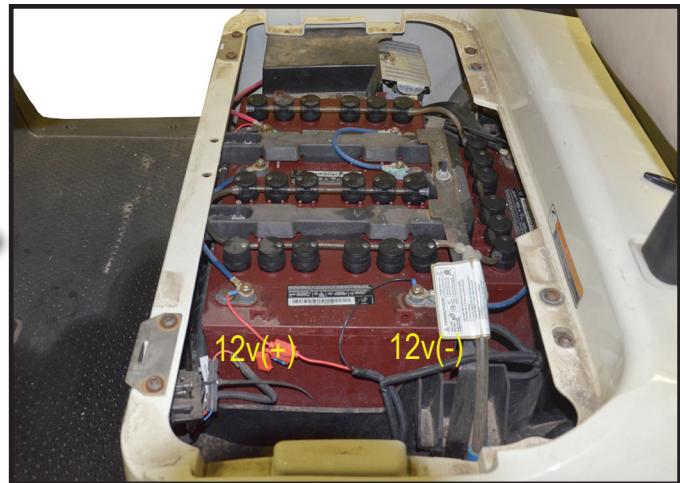

INSTALLATION COMPLETE