

STC JL EZ9 II EZGO Steering Stop


Installation Instructions for 2000.5-2005 EZGO TXT Models



BUGGIES
UNLIMITED

Please remember to wear appropriate eye protection

- A) Raise vehicle and support with jack stands.
- B) Remove driver's side wheel.
- C) On the backside of the driver's side of the front axle, locate the corner where the spindle U-bracket is welded to the axle beam.
- D) Place the steering stop in this corner and mark where the mounting hole will need to be drilled.
- E) Using a 1/4" bit, drill through the front axle beam.
- F) Bolt the steering stop to the axle using the supplied 1/4" bolt, washer, and lock nut and tighten to 6-9 foot pounds.
- G) While applying torque to bolt, hold steering stop in the correct position.
- H) Reinstall wheel, remove jack stands and lower cart.

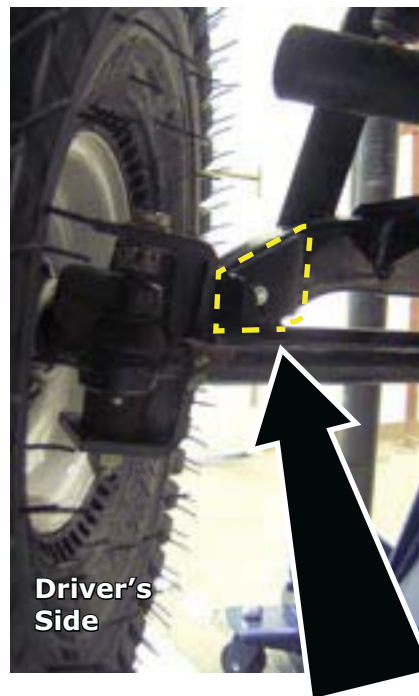

Buggies Unlimited
1-888-444-9994
www.buggiesunlimited.com