

EZGO RXV NERF BARS


Installation Instructions

Black- Part# 7458



Parts List

Driver Side Nerf Bar-1
Passenger Side Nerf Bar-1
Nerf Bar Mount-1
Diamond Plate Step-2
Hardware Kit-1

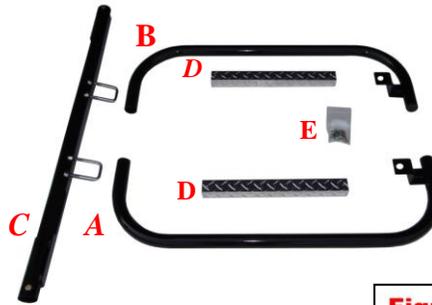

 Always wear appropriate eye protection!

NOTE: Driver and passenger side nerf bar are different, the top picture shows the nerf bars as you would see them looking at the driver side of the car. The raised mounting plate goes to the rear of each side as shown.

1. Lift the car and place the frame on jack stands.
2. Using the supplied u-bolts loosely mount the nerf bar mount to both sides of the I-Beam frame as shown in FIGURE 1. Do not tighten at this time.
3. Loosely install the front portion of the nerf bars (Items A & B) to the nerf bar mount (Item C) at this time using the supplied 5/16 x 2 1/4" bolts, locknuts & flat washers as shown in FIGURE 2. Do not tighten at this time. **NOTE: When mounting make sure tabs are on the bottom and**
4. Install the rear bar mounts to the stock body mounting stud using the supplied M10 x 1.5 locknut, & flat washers as shown in FIGURE 3.
5. Once nerf bars are in place securely tighten all bolts.
6. This nerf bar kit comes with an optional diamond plate step (Item D). If you want to install the diamond plate step place it on top of the nerf bar in the desired location. Using a marker or punch mark the three holes on the nerf bar. Using a 3/16 drill bit drill through the three marked holes in the nerf bar. **NOTE: Make sure you only drill through the top section of the nerf bar. You do not drill through the entire nerf bar.**
7. Using the supplied rivets mount the diamond plate step to the nerf bar using the 3 holes you just drilled.

